

SPECIFICATIONS

Prepared on:
June 28, 2005



Updated on:
June 28, 2005

Page 1 of 2


Product name: APP PAINT STOP - class G3 (EU3) dry floor filter for spray lacquering cabins

Description and usage:

The APP PAINT STOP-type unwoven fabric mats (green-and-white) are designed for arresting conventional and water-thinned paints in the spray painting systems during the car production process, and in paint shops used for lacquering and industrial painting (e.g. of furniture, windows, and machine parts).

Material description:

Dry filtering medium installed progressively (in an advanced way), with resistant fibres, 100% glass fibre. Fibres are laminar with an elastic matrix structure. Green colour on the air inlet side. Silicon-free.

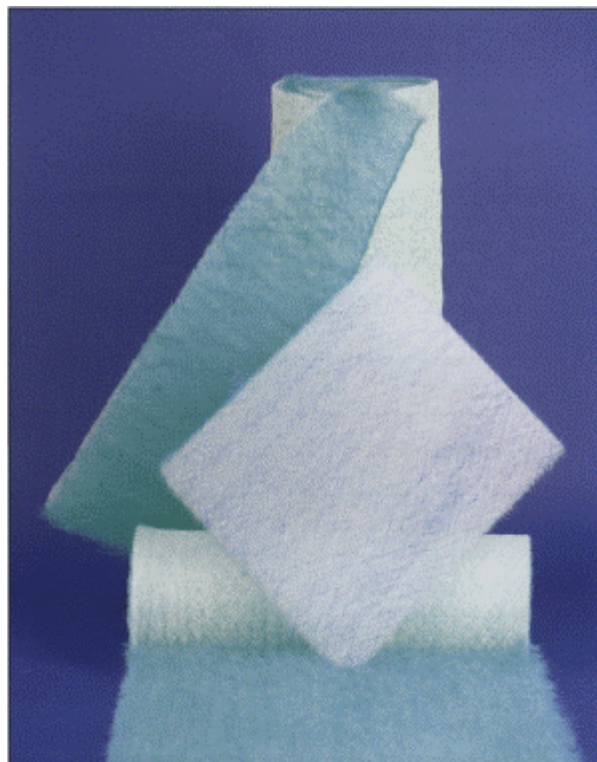

Approvals / Certificates: <ul style="list-style-type: none">• The product is approved for industrial use in the car manufacturing processes.
Material information: <ul style="list-style-type: none">• Resistance to fire in compliance with the DIN 4102.
Roll dimensions: <ul style="list-style-type: none">• 0.76m x 25m• 0.86m x 25m• 1.00m x 25m• 1.20m x 25m

Special features:

The APP PAINT STOP-type floor filter (green-and-white) is a high-performance filtering mat, which arrests excess amounts of conventional and water-thinned paints. The element is provided with an integral base laminated on the clean air side. Under air pressure, the rare labyrinth-type structure intensifies identical excess paint over its entire volume, which ensures maximum reliability of work. Progressively laid fibres guarantee high filtering efficiency and satisfy legal requirements regarding polluted air purification.

The above information complies with current knowledge on our products and their possible applications.

This guarantees no specific properties or usability in particular conditions. Users should observe guidelines and warnings provided on product labels and specified in material safety data sheets. We hold no responsibility if conditions beyond our control affect the final result of work.

tel. + 48(prf)61 437 00 00

SPECIFICATIONS

Prepared on:
June 28, 2005



Updated on:
June 28, 2005

Page 2 of 2

Product name: APP FL220 - class G4 (EU4) pocket filters made of unwoven filtering mat, for spray lacquering cabins

The APP PAINT STOP G3 (EU 3) specifications	
filter class	G 3 (EU 3)
excess paint arrestance	93-97 %
paint absorption capacity at 80 Pa and 0.7 m/s	3500-4700 g/m ²
rated air flow	2500-6300 m ³ /h/m ²
air velocity	0.7-1.75 m/s
initial pressure loss	7-40 Pa
weight	240-250 g/m ²
thickness	65-70 mm(3'')
standard length	25m
small roll (25m) width	0.76m;0.86m;1.00m;1.20m

The above information complies with current knowledge on our products and their possible applications. This guarantees no specific properties or usability in particular conditions. Users should observe guidelines and warnings provided on product labels and specified in material safety data sheets. We hold no responsibility if conditions beyond our control affect the final result of work.

**Auto Plast Produkt Sp. z o.o. [Ltd.] 62-300 Września, ul. Przemysłowa 10, Poland
tel. + 48(prf)61 437 00 00**